


PULSE TRANSFORMER



R12703 SERIES

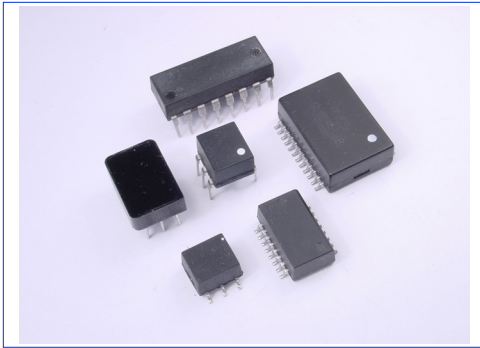


- RoHS Compliant Product
- Hipot : 500V_{RMS} Primary to Secondary
- Turns Ratio : 1 : 1 ±2%
- Rise Time: 3.5 nS Max
- OCL, L_L, C_{ww} are measured @ 100KHz, 100mV
- Operating Temp : -40°C to +85°C


ELECTRICAL SPECIFICATION @ 25°C

Part Number	OCL μH ±20%	L _L μH Max	C _{ww} pF Max	DCR Ω Max	ET V-μS Min
R12703-					
200	20	0.20	6	0.20	1.50
350	35	0.20	8	0.25	1.50
500	50	0.35	9	0.30	2.10
750	75	0.35	10	0.30	2.10
101	100	0.40	10	0.30	2.50
151	150	0.40	12	0.30	2.50
201	200	0.45	15	0.30	3.00
501	500	0.50	25	0.30	3.50

Mechanical

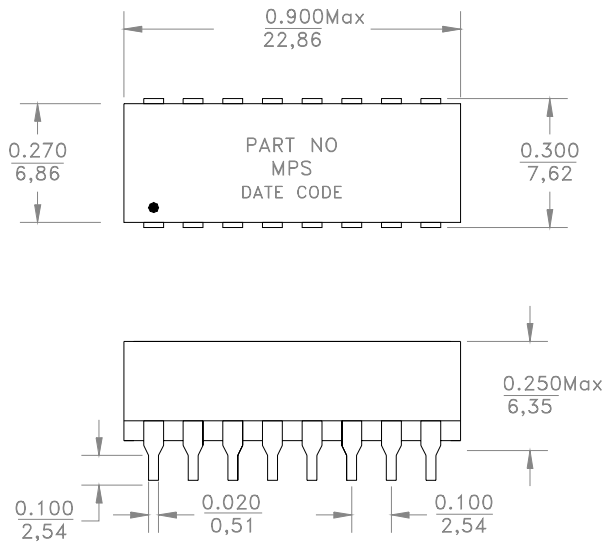

Schematic

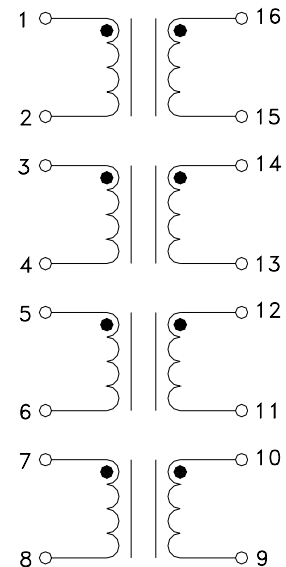

Dimensions

Unless otherwise specified, all tolerances are:
 inch: .XX : ± 0.015 .XXX : ±0.004
 mm: X,X : ± 0,38 X,XX : ±0,10

Product performance is limited to specified parameter. Data is subject to change without prior notice.

R12703-XXX
06061W

2463 208th, Ste. 205
Torrance, CA 90501

Phone: (310)533-1455
Fax: (310)533-1853

<http://www.mpsind.com>
Email: sales@mpsind.com