


# PULSE TRANSFORMER



## R12704 SERIES

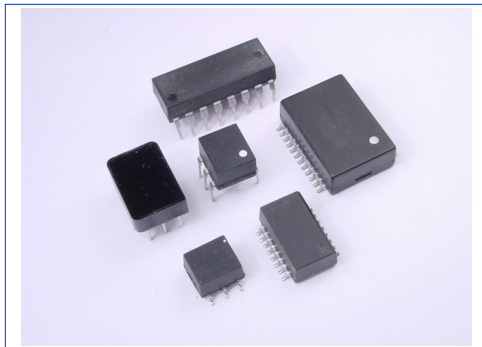


- RoHS Compliant Product
- LL, CWW are measured @ 100KHz, 20mV
- Operating Temp : 0°C to 70°C

### ELECTRICAL SPECIFICATION @ 25°C

Part Number	Primary Inductance μH Min	Testing Freq KHz 0.1V <sub>RMS</sub>	Primary Pins	Leakage Inductance μH Max	Interwinding Capacitance pF Max	Turns Ratio Pri:Sec ±5%	DCR Ω Max PRI	DCR Ω Max SEC	Hipot V <sub>RMS</sub> Min	SCHEMATIC
R12704-1	40	100	1-5	0.1	5	1:1	0.2	0.2	3000	A
R12704-2	1200	10	1-5	0.8	25	1CT:1	0.7	0.7	1500	B
R12704-3	1200	10	1-5	0.55	25	1CT:2CT	0.7	1.2	1500	C
R12704-4	1200	10	1-5	0.8	35	1:1.4CT	0.7	0.8	1500	D
R12704-5	1200	10	1-5	0.8	35	1 : 1.36CT	0.7	0.9	1500	D
R12704-6	1200	10	1-5	0.5	35	1 : 2.3CT	0.7	1.7	1500	D
R12704-7	1200	10	2-6	0.5	35	1 : 2CT	0.7	1.2	1500	B
R12704-8	5000	10	1-2	1.3	70	1:1:1	3.9	3.9	500	E
R12704-9	2060	10	1-5	0.6	35	1:1	1.5	1.5	500	A
R12704-10	2500	10	1-5	1.3	70	1:1	3.9	3.9	2000	A
R12704-11	19	100	1-5	0.6	0.06	1:2CT	0.15	0.3	3000	D


### Mechanical

### Schematic

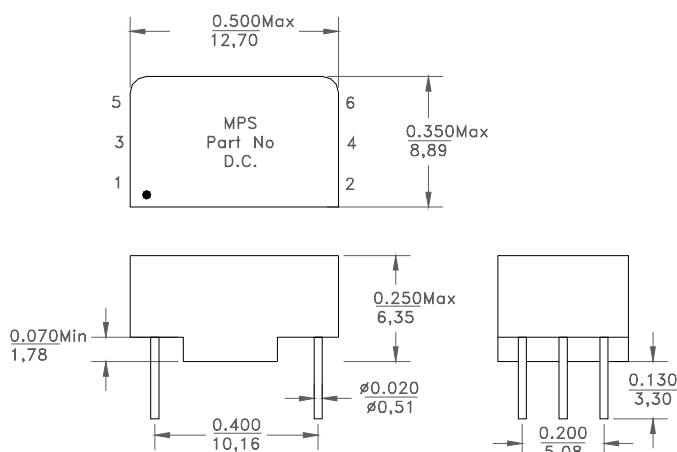

#### Dimensions

Unless otherwise specified, all tolerances are:  
 inch: .XX : ± 0.015 .XXX : ± 0.004  
 mm: X,X : ± 0,38 X,XX : ± 0,10

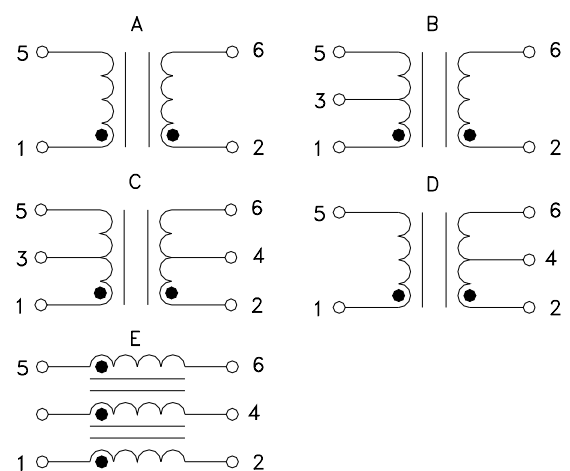

Product performance is limited to specified parameter. Data is subject to change without prior notice.

R12704-XXX  
06061W

2463 208th, Ste. 205  
Torrance, CA 90501

Phone: (310)533-1455  
Fax: (310)533-1853

<http://www.mpsind.com>  
Email: [sales@mpsind.com](mailto:sales@mpsind.com)