

VIDEO ISOLATION TRANSFORMER



R3554




- Video Hum Elimination for CCTV applications
- RoHS Compliant Product
- Operating Temperature: 0°C to +70°C
- Hipot: 500VDC, 1KMΩ
(connector to connector, connectors to case)
- Ground isolation (50/60 Hz): 90 dB
- Custom design available on request

ELECTRICAL SPECIFICATION @ 25°C


Part No.	Impedance (Input : Output)	DC Input Impedance ±5%	Bandwidth ±3dB (Ref to 100KHz) Typical @ 2V _{p-p} Input
R3554	75Ω : 75Ω	270Ω	25Hz to 8MHz

MECHANICAL

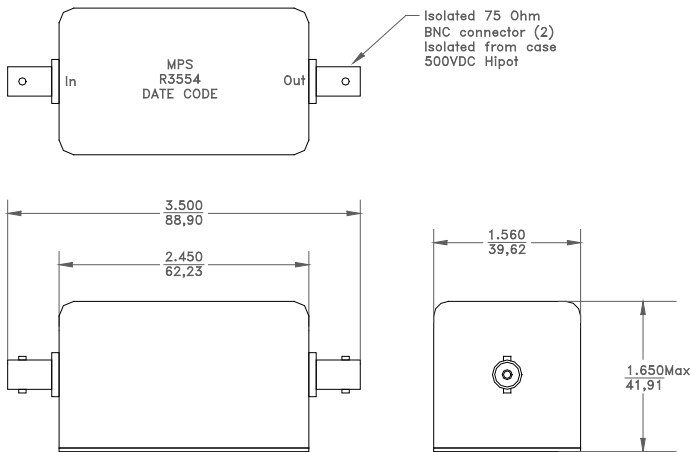


Product performance is limited to specified parameters.
Data is subject to change without prior notice.

SCHEMATIC

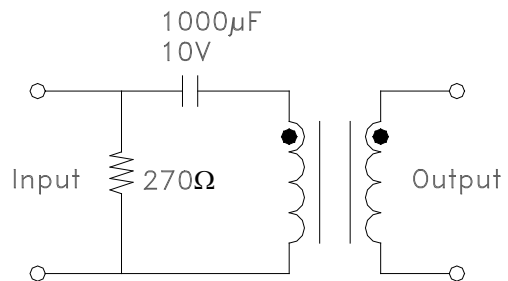

CMR Test Ckt

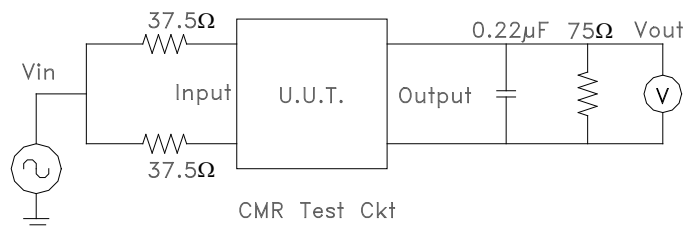

Dimensions

Unless otherwise specified, all tolerances are:
 inch: .XX : ±0.010 .XXX : ±0.003
 mm: X,X : ±0,254 X,XX : ±0,076